


# F-DOADM-8DC

8-channel DWDM “drop and continue” OADM with monitor ports

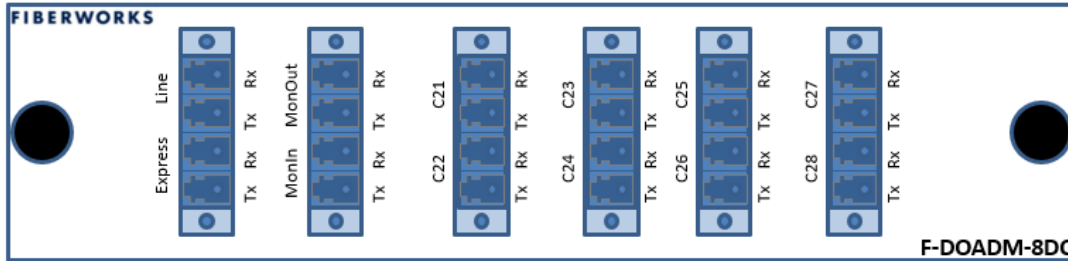

## DESCRIPTION


This compact DWDM optical add/drop multiplexer (OADM) covers 8 consecutive DWDM channels in one direction (“drop and continue”). It can also be used as a DWDM multiplexer with upgrade port.

Monitor ports ensures easy troubleshooting without downtime.

## FEATURES

- Dense WDM in compliance with ITU-T G.694.1
- 8 channel DWDM OADM with 100 GHz channel spacing
- 1% monitoring ports for Tx and Rx
- Based on thin film optics with epoxy free optical path
- Protocol transparent (support 1G, 10G etc.)
- 19" rack module
- LC connectors

## FUNCTIONAL DESCRIPTION

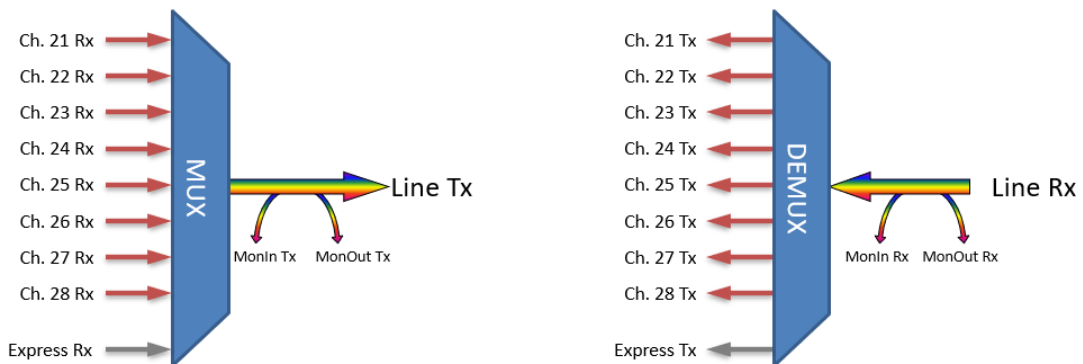

**TECHNICAL DATA**

Parameter	Unit	Value
Central wavelength	THz	ITU-T DWDM Grid
Channel spacing	GHz	100
Channel count		8
Channel Flatness	dB	< 0.4
Channel Passband (@ - 0.5 dB bandwidth) Min.	nm	0.22
IL add/drop (max)	dB	3.0
IL passthrough (max)	dB	3.0
Adjacent channel isolation	dB	> 30
Non-adjacent channel isolation	dB	> 40
Isolation(In → Out@ λ drop)	dB	> 15
Wavelength thermal stability	nm/°C	< 0.002
Insertion Loss thermal stability	dB/°C	< 0.005
PDL	dB	< 0.2
PMD	ps	< 0.2
Return Loss	dB	> 45
Monitoring ports power level (approx.)	dB	P <sub>Line port</sub> - 22
Operating temperature	°C	-5 to +65
Storage temperature	°C	-40 to +85
Dimensions (H x W x D)	mm	43.6 x 183 x 118.5

**ORDERING INFORMATION**

Product number	Name	Description
F-DOADM-8DC-MLU- <i>xxyy</i> *)	F-DOADM-8DC	Fiberworks 8 ch. DWDM OADM w/mon.ports, "drop and continue", LC

\*) «xx» and «yy» indicates ITU DWDM channel numbers. Possible values for *xyy* are:

2128  
2936  
3744  
4552  
5360