


AERIAL SPLICING AND TERMINATION BOX

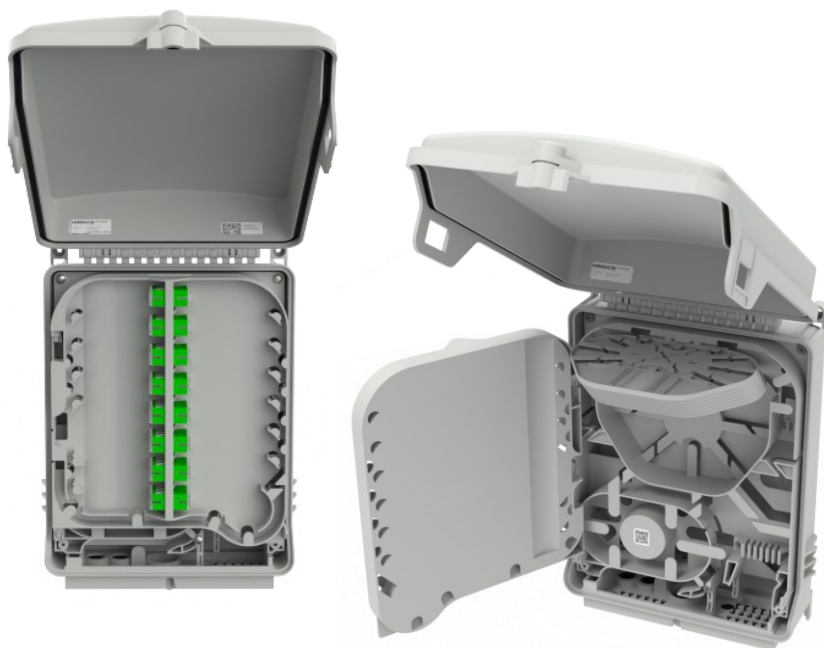

APPLICATIONS

Building Termination Point (PTE) for fiber optic networks, with 24 SC/APC adapters, for indoor/outdoor applications to be installed on:

- wall,
- pole
- inside cabinet using the inner core.

It is used to build up the optical termination point for GPON or ultra-broadband networks and allows to manage the incoming and the outgoing cables, splicing and terminating them on a dedicated patch panel.

The inner space guarantee always a minimum bending radius of 30mm.

SPECIFICATIONS

MAXIMUM DIMENSIONS
SPLICE CAPACITY*
MAXIMUM TERMINATION CAPACITY
PORTS TYPE

280x220x90 mm
72 standard smooove
24 SC/APC
1 oval port for looped cable up to 18mm(eg. ADSS)
2 ports for cables up to 10mm
24 ports for single fiber cable up to 4.5mm
1 port for Other Local Operator (max 24x2mm/12x3mm)
Yes
30mm
IP 55 EN 60 529, 5th ed. 1992 and IEC 529
IK 10 IEC 62262
PC/ABS V-0 RAL 7035
-40 ÷ +70 °C

EXTRA LENGTH AREA
MINIMUM BENDING RADIUS
IP RATING
IMPACT RATING
MATERIAL
OPERATING TEMPERATURE

*Referred to Splice Tray Type installed

ORDERING INFORMATION



H-ODB-M-□□□□-□□□□□□

Adapter No.

00÷24

Adapter Type

S ▶ SC
L ▶ LC

Adapter Color

G ▶ Green
B ▶ Blue

Splice Tray Type

- O ▶ No Splice Tray
- S ▶ 12 Standard smooove
- M ▶ 24 Micro smooove or 12 Crimp protector
- P ▶ PLC Splice Tray

One letter for each box

