

OUTSIDE PLANT SOLUTION

RECTANGULA CLOSURE SIZE A-Empty



APPLICATION

Compact and flexible closure that comes in size A, with 1 oval and 6 round ports to be used as feeder, aggregation or distribution point in FTTx network

It can be installed, by using its mounting bracket, inside manholes, on poles and even on wall if need, always protecting fiber optic splices from water ingress (IP68- IEC 60529)

Standard configuration it comes with one compact mixer inside to enhance the splice capacity, compared with similar closure of the same size; standard mixer to increase the inner storage space it compatible as well.

TECHNICAL FEATURES

DIMENSION		320x261x159 mm
SPLICE CAPACITY	Crimp splice	216
	Standard sleeves	216
	Micro Sleeves	288
PORT NUMBER		1 oval port for looped cables 6 round port for cable to be terminated
EXTRA LENGTH AREA		Available
IP GRADE		IP 68
IMPACT GRADE		IK 10
MATERIAL	Main body	PP+GF – UV Resistant
	Inner parts	ABS – UL 94 V0
COLOR	Main body	Black RAL 9005
	Inner parts	Grey RAL 703505
STORAGE TEMPERATURE		-25°C ÷ + 60 °C
OPERATING TEMPERATURE		-40°C ÷ + 60 °C


CONFIGURATIONS



Rectangular Splice Closure Size A- Empty

P/N: H-OFCL-R16A-EMPTY



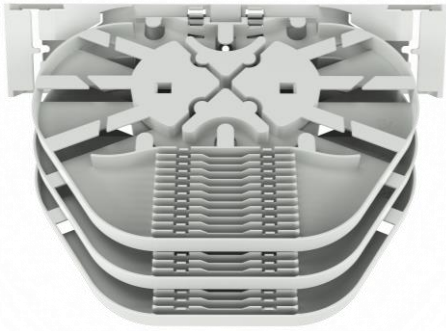

SPLICE CASSETTE UP TO 72 STANDARD SLEEVES

PART NUMBER	H-OFST-S-24STD
SUPPORT TYPE	Standard on riser bar
MATERIAL	PC+ABS - UL94- V0
COLOR	Grey RAL 7035
	Other colors available upon request
CASSETTE CAPACITY	24 Standard sleeves L _{max} 45mm



SPLICE CASSETTE UP TO 72 STANDARD SLEEVES

PART NUMBER	H-OFST-S-PLC
SUPPORT TYPE	Standard on riser bar
MATERIAL	PC+ABS - UL94- V0
COLOR	Grey RAL 7035
	Other colors available upon request
CASSETTE CAPACITY	24 Standard sleeves L _{max} 45mm



SPLICE CASSETTE UP TO 144 MICRO SLEEVES / 72 CRIMP SPLICE

PART NUMBER	H-OFST-S-12MICRO
SUPPORT TYPE	Standard on riser bar
MATERIAL	PC+ABS - UL94- V0
COLOR	Grey RAL 7035
	Other colors available upon request
CASSETTE CAPACITY	24 micro sleeves / 12 crimp splices



SPLICE CASSETTE UP TO 3 PLC STANDARD SLEEVES

PART NUMBER	H-OFST-S-PLC24STD
SUPPORT TYPE	Standard on riser bar
MATERIAL	PC+ABS - UL94- V0
COLOR	Grey RAL 7035
	Other colors available upon request
CASSETTE CAPACITY	2 PLC with splicing area for micro sleeves / crimp splices



STANDARD MIXER

PART NUMBER	H-OFCL-MIXER
SUPPORT TYPE	Standard on riser bar
MATERIAL	PC+ABS - UL94- V0
COLOR	Grey RAL 7035



COLD SEALING KIT FOR OVAL PORT 2x20

PART NUMBER H-OFCL-MOS-0220
CABLE ENTRY 1 IN – 1 OUT
CABLE RANGE 10-20mm



COLD SEALING KIT FOR OVAL PORT 2x12

PART NUMBER H-OFCL-MOS-0212
CABLE ENTRY 1 IN – 1 OUT
CABLE RANGE 5-12mm



COLD SEALING KIT FOR OVAL PORT 4x10

PART NUMBER H-OFCL-MOS-0410
CABLE ENTRY 1 IN – 1 OUT
CABLE RANGE 5-10mm



COLD SEALING KIT FOR ROUND PORT 16x3

PART NUMBER H-OFCL-MOS-1603
CABLE ENTRY 16
CABLE RANGE 0-3,3mm



COLD SEALING KIT FOR ROUND PORT 8x6

PART NUMBER H-OFCL-MDS-0806
CABLE ENTRY 8
CABLE RANGE 4-6,0mm



COLD SEALING KIT FOR ROUND PORT 6x8

PART NUMBER H-OFCL-MOS-0608
CABLE ENTRY 6
CABLE RANGE 6-8.2mm



COLD SEALING KIT FOR ROUND PORT 4x10

PART NUMBER H-OFCL-MDS-0410
CABLE ENTRY 4
CABLE RANGE 7-10.5mm



COLD SEALING KIT FOR ROUND PORT 2x12

PART NUMBER H-OFCL-MDS-0212
CABLE ENTRY 2
CABLE RANGE 8-12.7mm