


# Oversikt over WDM-kanaler

## DWDM

Kanal nr.	Frekvens [GHz]	Frekvens [THz]	Fiberworks varenr.	Cisco varenr.	Bølgelengde [nm]
17	191700	191,70	-D9170-	-63.11	1563,86
18	191800	191,80	-D9180-	-63.05	1563,05
19	191900	191,90	-D9190-	-62.23	1562,23
20	192000	192,00	-D9200-	-61.42	1561,42
21	192100	192,10	-D9210-	-60.61	1560,61
22	192200	192,20	-D9220-	-59.79	1559,79
23	192300	192,30	-D9230-	-58.98	1558,98
24	192400	192,40	-D9240-	-58.17	1558,17
25	192500	192,50	-D9250-	-57.36	1557,36
26	192600	192,60	-D9260-	-56.55	1556,55
27	192700	192,70	-D9270-	-55.75	1555,75
28	192800	192,80	-D9280-	-54.94	1554,94
29	192900	192,90	-D9290-	-54.13	1554,13
30	193000	193,00	-D9300-	-53.33	1553,33
31	193100	193,10	-D9310-	-52.52	1552,52
32	193200	193,20	-D9320-	-51.72	1551,72
33	193300	193,30	-D9330-	-50.92	1550,92
34	193400	193,40	-D9340-	-50.12	1550,12
35	193500	193,50	-D9350-	-49.32	1549,32
36	193600	193,60	-D9360-	-48.51	1548,51
37	193700	193,70	-D9370-	-47.72	1547,72
38	193800	193,80	-D9380-	-46.92	1546,92
39	193900	193,90	-D9390-	-46.12	1546,12
40	194000	194,00	-D9400-	-45.32	1545,32
41	194100	194,10	-D9410-	-44.53	1544,53
42	194200	194,20	-D9420-	-43.73	1543,73
43	194300	194,30	-D9430-	-42.94	1542,94
44	194400	194,40	-D9440-	-42.14	1542,14
45	194500	194,50	-D9450-	-41.35	1541,35
46	194600	194,60	-D9460-	-40.56	1540,56
47	194700	194,70	-D9470-	-39.77	1539,77
48	194800	194,80	-D9480-	-38.98	1538,98
49	194900	194,90	-D9490-	-38.19	1538,19
50	195000	195,00	-D9500-	-37.,4	1537,40
51	195100	195,10	-D9510-	-36.61	1536,61
52	195200	195,20	-D9520-	-35.82	1535,82
53	195300	195,30	-D9530-	-35.04	1535,04
54	195400	195,40	-D9540-	-34.25	1534,25
55	195500	195,50	-D9550-	-33.47	1533,47
56	195600	195,60	-D9560-	-32.68	1532,68
57	195700	195,70	-D9570-	-31.,9	1531,90
58	195800	195,80	-D9580-	-31.12	1531,12
59	195900	195,90	-D9590-	-30.33	1530,33
60	196000	196,00	-D9600-	-29.55	1529,55
61	196100	196,10	-D9610-	-28.77	1528,77

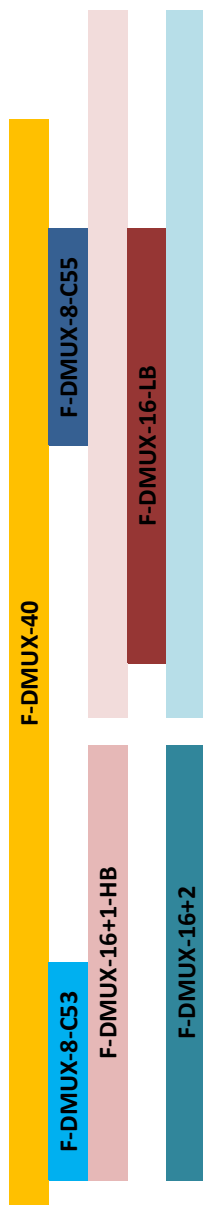

## CWDM

Kanal nr.	Bølgelengde [nm]
61	1611
59	1591
57	1571
55	1551
53	1531
51	1511
49	1491
47	1471
45	1451
43	1431
41	1411
39	1391
37	1371
35	1351
33	1331
31	1311
29	1291
27	1271



Eksempel Fiberworks varenummer: SFP-10G-LR40-**D9310**-C = 193,10 THz / 1552,52 nm  
 Eksempel Cisco varenummer: DWDM-SFP10G-**52.52** = 193,10 THz / 1552,52 nm