


F-CEX-GX-SCA-2L3

GPON and XGX-PON Coexisting Element Double Multiplexer

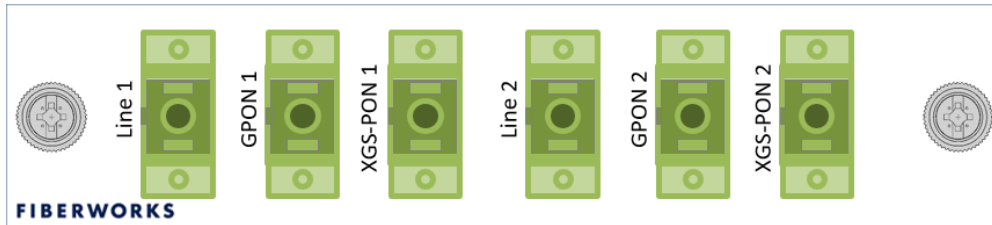


DESCRIPTION

This compact PON Coexisting Element multiplexer allows GPON and XGX-PON to be operated on the same fiber tree. The LGX3 form factor enables 14 modules with a total of 28 multiplexers to be placed in a 3RU chassis. Low insertion loss ensures minimal impact on the optical performance of the PON systems.

FEATURES

- Coexisting Element (CEx) based on passive wavelength division multiplexing
- Supports GPON according to ITU-T G.984 and XGS-PON according to ITU-T G.9807.1
- Low insertion loss
- Based on thin film optics with epoxy free optical path
- Two multiplexers in one LGX3 module
- Compact LGX3 form factor - Three modules fit in 1U in 19" chassis or 14 modules in 3U chassis
- SC/APC connectors

FUNCTIONAL DESCRIPTION

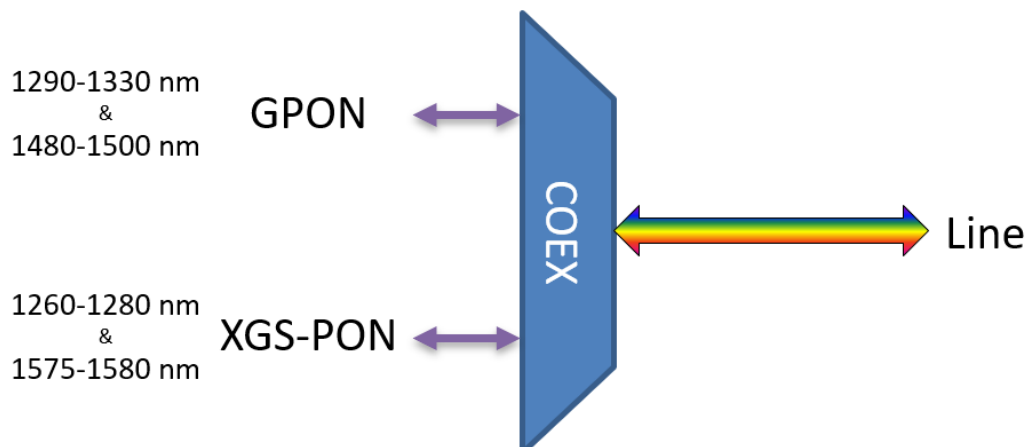

TECHNICAL DATA

Parameter	Unit	Value
Pass band GPON port	nm	1290-1330 & 1480-1500
Pass band XGX-PON port	nm	1260-1280 & 1575-1580
Insertion loss GPON port	dB	< 1.0
Insertion Loss XGX-PON port	dB	< 0.8
Isolation GPON port	dB	> 15
Isolation XGX-PON port	dB	> 30
Directivity	dB	> 55
Return Loss	dB	> 50
Polarization dependent loss	dB	< 0.10
Power Handling	mW	< 500
Operating temperature	°C	-30 to +70
Storage temperature	°C	-40 to +85
Dimensions (H x W x D)	mm	29 x 130 x 160

ORDERING INFORMATION

Product number	Description
F-CEX-GX-SCA-2L3	Fiberworks PON CEx mux, double, LGX3 GPON + XGS-PON, SC/APC connectors
F-CHASSIS-19-LGX3+14	Fiberworks 19" 3U LGX3 / TG-chassis for 14 modules, open frame